

PV-MF185UD4 185Wp
PV-MF180UD4 180Wp
PV-MF175UD4 175Wp
PV-MF170UD4 170Wp



F i r s t
I n
Q u a l i t y

High Efficiency

- Solder-Free Cells
- Fine Grid Electrodes
- BSF (Back Surface Field) Structure
- Anti-Reflective Coating
- Back Film Reflected Light
- Cerium-Free/High-Transmittance Glass
- High Power Output in Actual Use

High Reliability


- Original Derating Design Concept
- Straight Tabs
- Double-Sided Independent Tabs
- Reliable Bus Bar
- Corrosion-Resistant Frame
- High Tensile Strength Structure
- Solid Frame Structure
- Tempered Glass
- Triple-Layer Structure Back Film

High Safety

- Triple-Layer Structure Junction Box
- Ultra Reliable Bypass Diode
- Locking Electrical Connectors
- Conforms to IEC 61215 and TUV Safety Class II Standards

Eco-Friendly

- Lead-Free Solder PV Modules
- Manufactured in an ISO 14001 Certified Plant
- Recyclable Steel Pallets

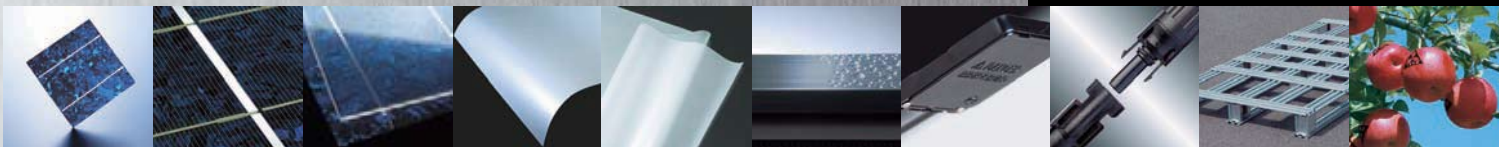


MITSUBISHI ELECTRIC

| | | | |
|--|-------------|-------------|-------------|
| PV-MF185UD4 | PV-MF180UD4 | PV-MF175UD4 | PV-MF170UD4 |
| Polycrystalline silicon, 156 x 156 mm square, Solder-coatingless | | | |
| 50 cells in a series | | | |

| | |
|--------|--------|
| 175W | 170W |
| 166.3W | 161.5W |
| 30.2V | 29.9V |
| 7.93A | 7.83A |
| 23.9V | 23.7V |
| 7.32A | 7.19A |

DC 600V
15A
(+) 31.5 inch (800mm) / (-) 49.21 inch (1250mm) with MC connector

| | | | |
|---------------------|-------|-------|-------|
| 13.4% | 13.0% | 12.7% | 12.3% |
| 43.0 lbs. (19.5 kg) | | | |
| 2 pcs - 1 carton | | | |
| IEC 61215, UL1703 | | | |

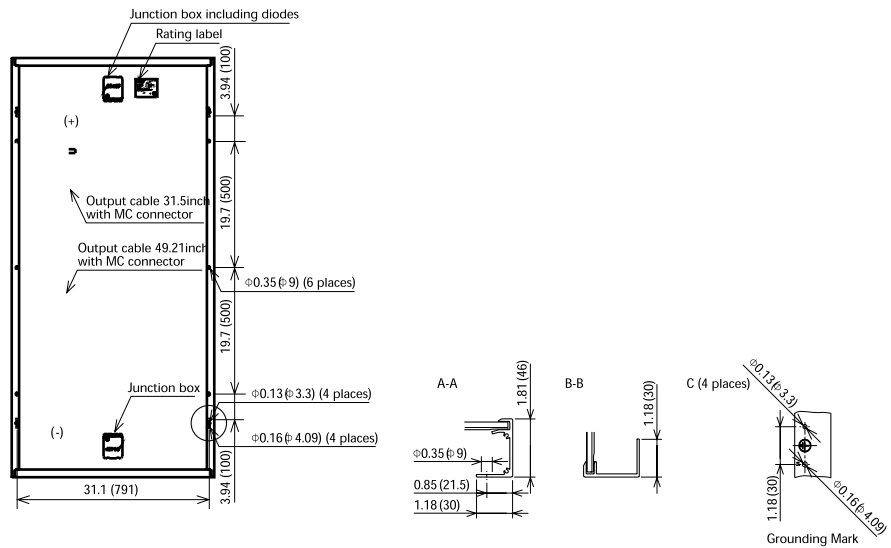

Mitsubishi Electric & Electronics USA, Inc.
5665 Plaza Drive, Cypress, CA 90630-0007
Phone: 714-229-3814 Email: pv@meus.mea.com

<http://www.MitsubishiElectric.com/products/solar.html>